

SPECIFICATIONS


OUTLINE DRAWING

Modulation Input

Input Impedance 50 Ohms
 Analog Input (SMC) 0 to +1.0 VDC

RF Output

Center Frequency (Fc) 260 MHz ± 0.1%
 Output Power (SMA Female) 1.5 W
 Rise/Fall Time 4 nsec Max
 RF Contrast Ratio 50 dB min
 Harmonic Distortion -20 dBc
 Output Impedance 50 Ohms
 Output VSWR 1.5 : 1 Max
 Power Supply Voltage +24 V @ 600 mA

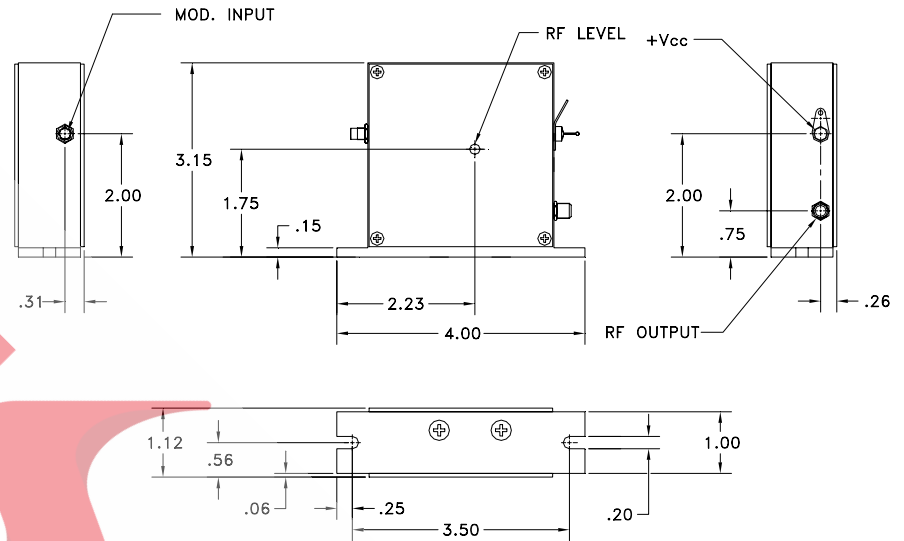

Notes:

- Output power factory set to 1.5 W at 1 Volt input. Power stability less than 5% over the heat sink's ambient temperature range of 0 - 40° C, after 5 minute warm-up.
- When calculating the contrast ratio, it is understood that only the power of the 260 MHz fundamental shall be used. The higher harmonics have no effect on the AO modulator's performance.
- RoHS Compliant.

Document

12/03/09

Control

THIS DOCUMENT IS THE PROPERTY OF CRYSTAL TECHNOLOGY, INC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF CRYSTAL TECHNOLOGY AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTERS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF CRYSTAL TECHNOLOGY.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Gerl Scholz 11/16/2009	Crystal Technology, Inc.
MATERIAL: 	CHK		DESCRIPTION: AODR 1260AF-AINA-1.5HCR
FINISH: 	APP		PART NUMBER: 97-02910-06
	APP		REV: A
			1 of 1